



Knight-Celotex Fiberboard
a Knight Company

Innovations in Fiber Technology®

NEW

SoundStop® Underlayment

FOR HARDWOOD AND LAMINATE FLOORING

Hear the SoundStop® Difference

SoundStop® Underlayment is the quality, affordable sound deadening choice for flooring in homes and offices, new and remodeled.



For a complete SoundStop® Sound Deadening Solution, use SoundStop® Underlayment with other SoundStop® brands

- SoundStop®
- SoundStop® FlameSpec®
- SoundStop® Tackable Wall Panels

Contact us today!
Product orders and customer service:
1.800.375.0289

Technical support:
1.800.596.9699

or visit
www.knightcelotex.com

- **Reduces noise within the room and above to below:**
 - Deadens "clacking" noise from walking
 - Achieves Sound Transmission Class (STC) rating of up to 53
 - Significantly reduces foot fall noise
 - Impact Insulation Class (IIC) rating of up to 57
- **Most affordable for significant noise reduction**
 - Compare cost and noise control with foam, cork and other underlayments
- **Environmentally friendly**
 - 93% natural wood materials
 - Member of Green Building Initiative (GBI)

- **Protects flooring investments**
 - Helps eliminate breakage of laminate click connections
 - High compressive strength of up to 4,100 lbs per square foot
 - Levels minor subfloor irregularities up to approx. 1/8" (3mm)
- **Thermal insulation**
 - Helps keep floors warm
 - Wood fiberboard has worldwide reputation for thermal insulation
- **Adds resale value**


Easy to install - cuts with a knife

- Thickness: Over 1/8" (4mm)
- Dimensions: 2' x 2' 6"
- Package Contents: 20 sheets
- Coverage: 100 square feet



SoundStop® Underlayment

FOR HARDWOOD AND LAMINATE FLOORING

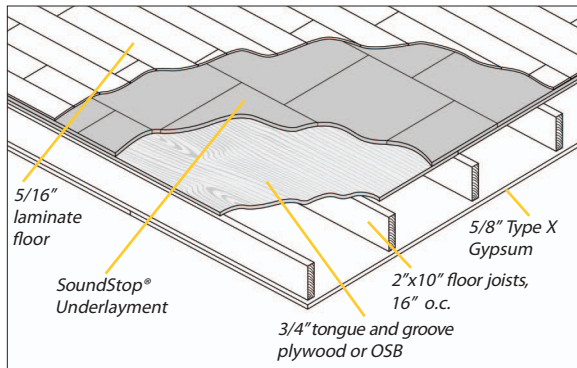

Here's an easy application.

- **Finished flooring:** 5/16" laminated flooring is laid to avoid shared seams with SoundStop® Underlayment.
- **Subflooring:** 3/4" tongue and groove wood structural panel subfloor. SoundStop® Underlayment is laid over subfloor with no fasteners or adhesives, avoiding shared seams. If subfloor is mineral based (e.g. concrete), a 2mm moisture barrier is recommended.
- **Framing:** 2" x 10" floor joists, 16" o.c.
- **Ceiling:** 5/8" Type X Gypsum wall board with seams taped.

Technical Information / Warnings / Warranty Information

STORAGE

PRIOR TO INSTALLATION, STORE AT A LOCATION WHERE HUMIDITY AND TEMPERATURE DUPLICATES THOSE DURING INSTALLATION AND OCCUPANCY IN ORDER TO STABILIZE THE PRODUCT. STORE IN COVERED UNHEATED AREA PROTECTED FROM THE WEATHER AT ALL TIMES. APPLY ONLY AS MUCH UNDERLAYMENT AS CAN BE COVERED BY COMPLETED FLOORING SYSTEM THE SAME DAY. THIS MATERIAL MUST BE KEPT DRY AT ALL TIMES. IF THE PRODUCT SHOULD GET WET, WAIT UNTIL IT IS COMPLETELY DRY BEFORE APPLICATION.

Characteristics, properties or performance of materials manufactured by Knight-Celotex, LLC herein described are derived from data obtained under controlled test conditions. Knight-Celotex, LLC makes no warranties, express or implied, as to the characteristics, properties, or performance under any variations from such conditions in actual construction. Knight-Celotex, LLC assumes no responsibility for the effects of structural movement.

Limited Warranty

Knight-Celotex, LLC warrants its products and materials against manufacturing defects and defective materials or workmanship for a period of six months from the date products are shipped from our plant.

Claims

If a claim is made under this warranty it must be in writing, describe the defect in full, and promptly submitted to our address below.

Exclusions from Warranty

1. Knight-Celotex, LLC strives to produce its products to obtain high quality and excellence however, these products are susceptible to imperfections due to the nature of the materials. All final decisions concerning quality and excellence remain exclusively in the discretion of Knight-Celotex, LLC.

2. This warranty does not include problems arising from improper installation, or exposure to moisture and does not cover normal wear and tear or changes in color or shape.
3. If a manufacturing defect does occur, Knight-Celotex, LLC will replace any defective products with new products but will cover only those particular items deemed to be defective. (Knight-Celotex, LLC reserves the right to refund to you the purchase price of any defective item.)
4. Failure to install in accordance with Knight-Celotex, LLC's approved procedures voids all warranties.

Remedies and Limitations

Knight-Celotex, LLC shall not be obligated or liable for labor or other costs related to dismantlement, installation, repair or replacement of defective products or materials.

Claims under this warranty are limited to replacement of defective products or material

Implied Warranties

No implied warranties shall extend beyond warranty as stated here.

Incidental or Consequential Damages

Knight-Celotex, LLC disclaims and will not be responsible for any incidental or consequential damages arising from any manufacturing defect in its products.

This Warranty is the only express Warranty provided by Knight-Celotex, LLC. No employee, representative or agent nor any other person has authority to assume or incur on behalf of Knight-Celotex, LLC any obligation or liability in place of or in addition to this Warranty. This Warranty provides specific legal rights, and other rights, which vary from state to state, may be available.

Notice: The information in this document is subject to change without notice. Knight-Celotex assumes no responsibility for any errors that may inadvertently appear in this document.

Contact us today!

Product orders and customer service:

1.800.375.0289

Technical support: 1.800.596.9699

or visit www.knightcelotex.com

© Knight-Celotex Fiberboard 2006
SSUSS 10.06



Knight-Celotex Fiberboard
a Knight Company

Innovations in Fiber Technology®

Trusted sound deadening expert
for more than 50 years